



Multiple views and flexible installation configurations create brilliant, dazzling centerpieces.



*CPF-38 peninsula, shown with brass bi-fold doors*

**LENNOX**<sup>™</sup>  
HEARTH PRODUCTS



*CST-38 see-through, shown with brass bi-fold doors*

**MERIT**<sup>™</sup> SERIES


The Merit™ Series wood-burning fireplaces beautifully enhance the ambiance of any home from any angle. Consider a corner unit (CR-3835) for a quiet retreat, the peninsula (CPF-38) for an island installation at the end of a wall or the see-through (CST-38) for a room divider. With a sleek look and design combined with the stunning beauty of a real wood fireplace, any of these fireplaces will create a dramatic focal point and offer optimal choices for installation versatility.



**CR-3835** Corner  
(right or left) configuration  
– left shown




**CPF-38** Peninsula  
(3-sided) configuration




**CST-38** See-Through  
(2-sided) configuration

### CR-3835 (RIGHT) DIMENSIONS

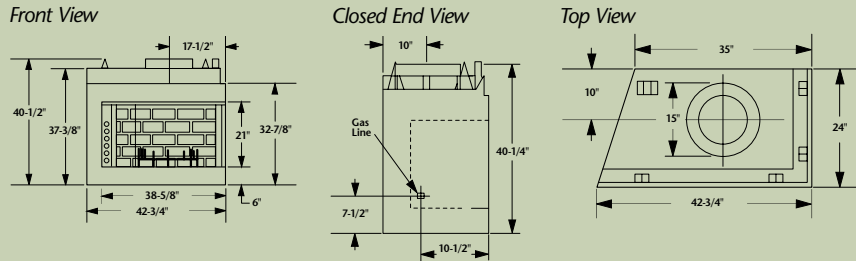

### CPF-38 & CST-38 DIMENSIONS

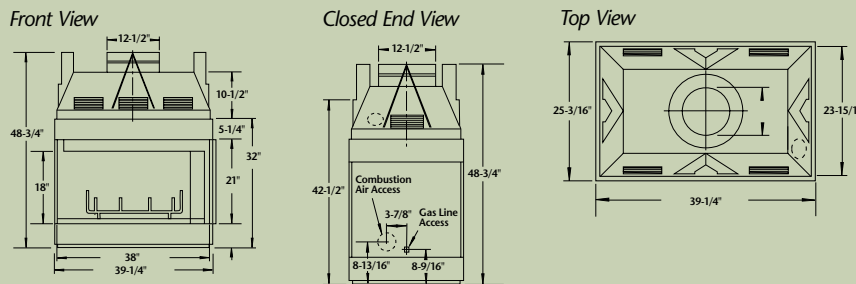

### FRAMING DIMENSIONS

Model	Width	Height	Depth
CR-3835	42-5/8"	40-5/8"	24"
CPF-38	39-1/4"	49"	24-3/16"
CST-38	40-1/4"	49"	24-3/16"

**On cover:** CR-3835 shown with polished brass bi-fold doors.

### PRODUCTS YOU CAN COUNT ON

Lennox is committed to providing you with high-quality products. A qualified dealer can help you find the right product to give you years of comfort and enjoyment.



Black door finish



Polished brass door finish



Brushed stainless door finish

### STANDARD FEATURES

Multi-view designs for the perfect fire presentation from any angle

Realistic brick-patterned liner frames the fire with the look of a realistic masonry fireplace

Uses economical Security™ FTF8 double-wall, air-cooled chimney system

Standard fuel grate, damper and mesh firescreens

Built-in outside air control mechanism

Gas connection knockouts on both sides of fireplace

Backed by the Good Housekeeping Seal

### OPTIONAL ACCESSORIES

Polished brass bi-fold glass doors or twin-pane doors and fixed end panels are required (CPF-38 & CST-38)

Polished brass bi-fold glass doors or twin-pane doors (CR-3835)

Black or polished brass bi-fold doors or twin-pane brass doors (CPF-38)

Black, polished brass or brushed stainless bi-fold doors or twin-pane brass doors (CST-38)

Outside combustion air kit

### IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Built to UL 127/ULCS610 standards. Agency report numbers and local approvals, including WA State and NYC, vary by model. Refer to specific installation instructions or our website for details.



**HEARTH PRODUCTS**

© Lennox Industries Inc. 2010

Visit us at [www.lennox.com](http://www.lennox.com), or contact us at 1-800-9-LENNOX.

